

Defects In Glass Bricks

Glass bricks are made from glass cast into a mould in two half pieces which are then sealed together as a hollow, whole glass block.

While the quality of the glass brick manufacturing is quite high, it isn't perfect. There are small defects that often present in the glass that a keen eye will pick up.


This is unfortunately unavoidable. Some of the manufacturing defects are small bubbles in the glass, occasional small lines looking like cracks but not going anywhere, small ripple lines on the surface where the molten glass was poured into the mould, small impurities in the glass, slightly dirty marks inside the brick itself, paint runs or splashes on the face of the glass brick.

Some of the transit defects (created during shipping or packing) are small scratches or chips, sometimes even entirely broken.

It is important to note that no glass bricks are made in Australia, they are all imported and it is a small market in Australia compared to Europe, Asia and North America. It is sad to say that often we (that is all Australian importers of glass bricks not just us) get sent what may be considered less than top quality products simply because it is impossible to send it back and we aren't a big enough market to demand better!

With this information in mind, this is how we handle defects, small manufacturing defects like bubbles etc we try to identify and install them away from eye level to make them as undetectable as possible. If any defects are blatantly obvious, we reject them but we can't reject them all, there would be too much wastage.

Defects such as chips and scratches are generally rejected outright unless they are very small and will never be seen in say, the outside face of a second storey window where nobody would ever see it. Sand blasting the outside face of glass bricks tends to highlight any defects much more so you need to be aware of this as they will show up small marks and we do have to use them. (See also section - Sand Blasted Glass Bricks)

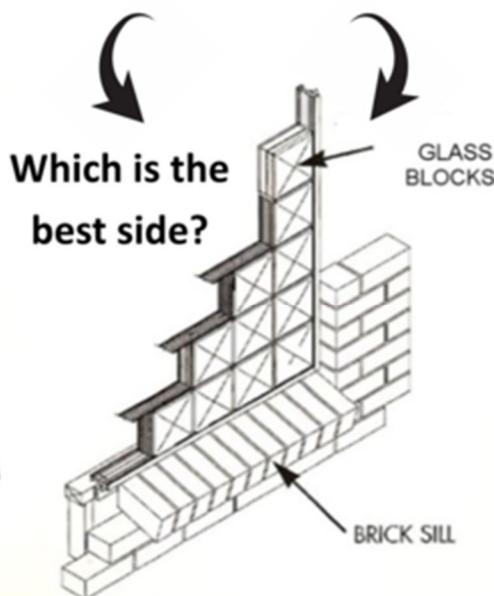

Which Is The Face Side Of The Panel?

Generally speaking, the face side of the wall would be the side that is seen the most, often the inside wall of a house or office where people generally spend the most time looking at the glass bricks.

Why does this matter?

The thing about glass bricks is that they are two halves of glass that have been welded together to form one unit. The issue is that this is not an exact science and there is variation as to how the glass brick ends up once welded. Sometimes they are not square from front to back (see above picture showing back face tilting - image exaggerates this to make it a more obvious example) and sometimes they could be a millimetre or two thicker or thinner.

INSTALLATIONS IN MORTAR: To create the best finish possible for both sides, we clamp a rigid straight edge (think of this as a string line that also supports the glass bricks as they are being laid) to the back of the frame at the height of each course of glass bricks to be laid. This allows us to keep the back side of the wall nice and straight so any variance in glass brick thickness is not seen on this side (inside this is not very obvious due to the rounded edges of the glass brick). We sight the edges of the glass bricks on the inside and adjust as necessary to keep the joint lines very straight inside where your eyes will look over it the most. Anything not square creating tapering joints or thick and thin joints will show up more outside where it is not as important. This method of installation allows us to give you a very nice balance of quality on both sides of the glass block wall.

IMPORTANT NOTE: the side we lay the glass blocks from will be the face side, if there is a physical barrier preventing us from laying the bricks from one side, say a staircase, a floor or wall that stops behind a glass brick panel that continues past then this will be the back of the wall. This is not a problem, the differences are very small and only the most scrutinous of gazes will detect the difference (in fact, if we didn't mention it here, most would never notice it at all).

INSTALLATIONS IN SILICONE: Due to the glass bricks sitting on thin plastic PVC or aluminium tracks with no way of adjustment, these variations in the glass blocks just are what they are. We do the best we can to make both sides of the wall look as good as we can but we are limited in what we can do, this is why we strongly recommend clear translucent silicone as the colour to fill the joints between glass bricks as this blends nicely into the colour of the glass and puts the focus on the glass bricks themselves, not the joints that separate them. (see also section -Why We Use Clear And Not Coloured Silicone)



Which Way Does The Pattern Get Laid?

There is no requirement for a pattern to get laid a particular way and if you have a preference, please let us know and we will give you what you want. As a default, this is what we do in the absence of other instructions or we are onsite ready to install and unable to contact the decision-maker:

Wave pattern - gets laid randomly as it looks the same as you look through it no matter how they get laid.

Sand Blasted Wave and Janus Icy patterns - the pattern on one side is more pronounced now so we lay them all with the same orientation with the obscure face on the outside creating the most privacy. With Sand blasting, the surface is pitted so easier to clean on the outside face with a hose.

Janus Story pattern - Wavy side inside oriented the same way with distorted lines on the outside face.

Crossrib and Xenon (Light Diffusing) patterns - with horizontal lines one side and vertical lines the other - the eye tends to be drawn firstly to horizontal lines before vertical lines. With this in mind, we put the horizontal lines on the inside face as this is where we put the most focus on alignment.

Ocean View pattern - will be laid with wavy pattern horizontal inside looking like a rolling sea rather than breaking surf waves if laid vertically.

Digona, Toba, Stella, Omega, Optical patterns etc - Directional patterns will be laid oriented the same way unless instructed otherwise.

La Rochere Nuagee Wave pattern - has a vertical aspect one side and horizontal the other, these will all be laid oriented the same way.

Rotational Symmetry patterns - any patterns that look the same regardless of which way they are laid, sideways, upside-down etc don't apply here unless they were sand blasted one side in which case they would be laid with the sand blasted face on the outside.



Sand Blasted Glass Bricks

(This section should be read in conjunction with the section on Defects In Glass Bricks.)


Any brick can be sand blasted which pits the surface of the glass giving it a very private, frosted appearance.

This is quite a nice look but it does create some challenges. The pitted face is much harder to keep clean than smooth glass, we recommend not having this face inside and not in a shower unless you like scrubbing! If it is on the outside, you can take to it with a broom, soapy water and a hose.

The sand blasted face is a visual barrier, from outside, the glass brick is now two-dimensional in appearance as you can't see the depth of the glass brick, on the inside you still see the depth which is lovely in appearance but as you can't see any further than this, your eye is more readily drawn to small defects in the glass bricks that were not noticeable before as your attention is drawn more to the view that is beyond the glass brick panel with its distorted shapes and colours. With sand blasted bricks you also lose colours in your view as all you see is filtered white light.

We try to discourage sand blasting as we have to compromise quality and use these bricks that present with small defects showing due to it not being economically viable to reject them all.

Taking into account all of what is written here about how the defects are highlighted with the sand blasted face on the outside of the glass block panel, the opposite is true if the sand blasted face is on the inside, it hides most defects well, so if this isn't in a wet area like a shower and doesn't require concentrated cleaning often, you may well want to use this pattern.

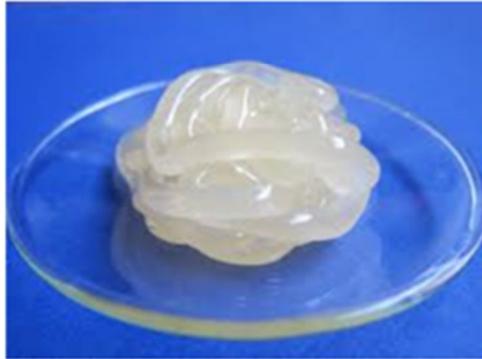

Why We Use Clear And Not Coloured Silicone

(Please read in conjunction with the section - Which Is The Face Side Of The Panel? particularly the INSTALLATIONS IN SILICONE: paragraph)

We want to give you the very best finished product possible so that you are very happy with what you end up with.

You may even get us back for more work and recommend us to others!

With that in mind, please understand that silicone is not an easy medium to work with and although silicone installations look great and are very versatile, they do have some challenges.

Sealing up every single joint between every glass brick on both sides of the wall amounts to a lot of silicone that will be seen, add to this that the joints intersect everywhere and that the edges of the glass blocks are rounded and that glass is transparent, that is a lot of varying surfaces to work with.

Anywhere the silicone touches the glass when being applied, is very hard to remove entirely.

We highly recommend clear (translucent) silicone because it blends nicely with the glass and doesn't highlight the joint lines.

This means that any little areas where the silicone has touched the glass and been removed is virtually invisible and is very pleasing to the eye.

It also means that any irregularities in the joints are nicely disguised.

Conversely, coloured silicone will contrast with the clear glass rather than blend and will highlight any variation in joint sizes, show silicone residue where removed from the glass and stick rather annoyingly to the tiny glass ridge line left from the casting mould where the curved face edge of the glass meets the flat side section (see close up picture of this)

To summarise, silicone joints looks best when blending with the glass bricks rather than contrasting which is a shame as there could be some nice alternative joint colours in silicone, they just come at a quality sacrifice to the joint finish.





Laminated Multi-Layer Fire Rated Glass Bricks

(Please read in conjunction with the section - Which Is The Face Side Of The Panel?)

With normal glass bricks being made of two halves of glass welded together and these multi-layered glass blocks sticking these together to form thicker bricks, they have a functional use in that they can provide an insulation rating in the Fire Resistance Levels (FRL) that are good for say fire escapes stairs past shared hallways for example.

This functionality does come at a cost unfortunately.

Consider the alignment issues mentioned in the other section with regards to not being square front to back with two pieces of glass joined together, with double thickness glass blocks there are now four pieces of glass stuck together, with triple thickness - six pieces of glass stuck together!

This does degrade the accuracy of alignment from one face to the other, so one side (the inside face or best face will look well aligned but the other can be quite problematic with thick and thin mortar joints.

The other compromise is that the silicone sealant used to join these bricks together is translucent, not clear so there is a degradation in the clarity of your view with multiple layers, this also creates the same challenge as sand blasting in that any small defects in those multiple layers are highlighted and at the cost of these bricks, they will be used and not rejected.

These particular bricks are extremely expensive and do have a place in our building industry but if they are not essential to the fire performance requirements of your construction, there are much cheaper and far more attractive alternatives by bypassing the insulation rating if not necessary.